

POLICY NO. 6 (UNDERGROUND UTILITIES ON ST. CLAIR
COUNTY HIGHWAY RIGHT OF WAY)

1. All pipe lines and/or cables or any buried utilities shall have a minimum cover of 30" except where crossing side drainage ditches where the minimum cover shall be 24". All excavations within the right of way and not under paving shall be backfilled by tamping in 6" layers or by puddling. All surplus materials shall be removed from the right of way and the excavations finished flush with adjoining ground.
2. Where sodding is disturbed on improved roads by excavation or backfilling operation, such areas shall be replaced with mulch sodding on all slopes of 5% or less. All slopes over 5% shall be replaced with block sodding.
3. All pipe lines and/or cables or any buried utilities crossing under existing paved roads and cross roads within the right of way limits shall be bored, jacked or tunneled and encased. Borings, jacking or tunneling and casing shall extend from toe of shoulder slope to toe of shoulder slope. All boring, jacking or tunneling and casing shall be done as shown by the drawing attached.
4. Where it is evident that boring is impractical due to rock or other obstructions the County Engineer, after notification of such problems, may grant permission to open cut the paving. Where open cutting is allowed, the following conditions will be met: (a) No materials removed from the excavation is to be placed back in the cut. (b) Cut shall be backfilled with aggregate, such as 8910, or with #6, #5 stone to within 6 inches and then cold mix asphalt to the top of cut. (c) One-half of the traveled portion of the paving must be open to traffic at all times. (d) Open cutting of pavement shall be done as shown in attached drawing.

Adopted this 14th day of February, 1995.

ST. CLAIR COUNTY
PERMIT FOR WORK ON COUNTY RIGHT OF WAY

Name _____ Date _____

Address _____ Tel. No. _____

Location _____

_____ Sec. _____ Twp. _____ Range _____

Description of Proposed Work _____

Authorization

In making this request, I, the undersigned, do agree to perform the above described work in keeping with policies established by St. Clair County Commission, in such a way as to leave county road and right of way in a condition as good as before said work was commenced, putting special emphasis on the following: 1. Pleasing appearance 2. Proper Drainage. 3. Proper Erosion Control.



It is understood that St. Clair County will not be responsible for conflict with utility due to road maintenance or road construction. No plowing will be allowed along any paved road. All cable will be placed behind ditch line on paved roads except when specified by County Engineer. It is understood and agreed by the undersigned party that if County Road and County right of way is not restored in as good condition as before said work was commenced, that the County is authorized to have corrections made at the expense of the utility company involved.
SEE ATTACHED SPECIFICATIONS AND DRAWING.

Utility Company _____

By: _____

SPECIFICATIONS FOR LOCATING
UNDERGROUND UTILITIES ON ST. CLAIR
COUNTY HIGHWAY RIGHT OF WAY

1. All pipe lines and/or cables or any buried utilities shall have a minimum cover of 30" except where crossing side drainage ditches where the minimum cover shall be 24". All excavations within the right of way and not under paving shall be backfilled by tamping in 6" layers or by puddling. All surplus materials shall be removed from the right of way and the excavation finished flush with adjoining ground.
2. Where sodding is disturbed on improved roads by excavation or backfilling operation, such areas shall be replaced with mulch sodding on all slopes of 5% or less. All slopes over 5% shall be replaced with block sodding.
3. All pipe lines and/or cables or any buried utilities crossing under existing paved roads and cross roads within the right of way limits shall be bored, jacked or tunneled and encased. Borings, jacking or tunneling and casing shall extend from toe of shoulder slope to toe of shoulder slope. All boring, jacking or tunneling and casing shall be done as shown by the drawing attached.
4. Where it is evident that boring is impractical due to rock or other obstructions the County Engineer, after notification of such problems, may grant permission to open cut the paving. Where open cutting is allowed, the following conditions will be met: (a) No materials removed from the excavation is to be placed back in the cut. (b) Cut shall be backfilled with aggregate, such as 8910, or with #6, #5 stone to within 6 inches and then cold mix asphalt to the top of cut. (c) One-half of the traveled portion of the paving must be open to traffic at all times. (d) Open cutting of pavement shall be done as shown in attached drawing.

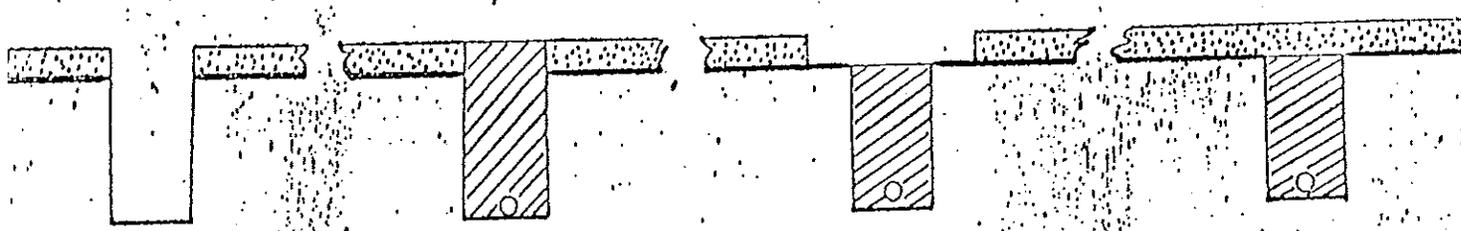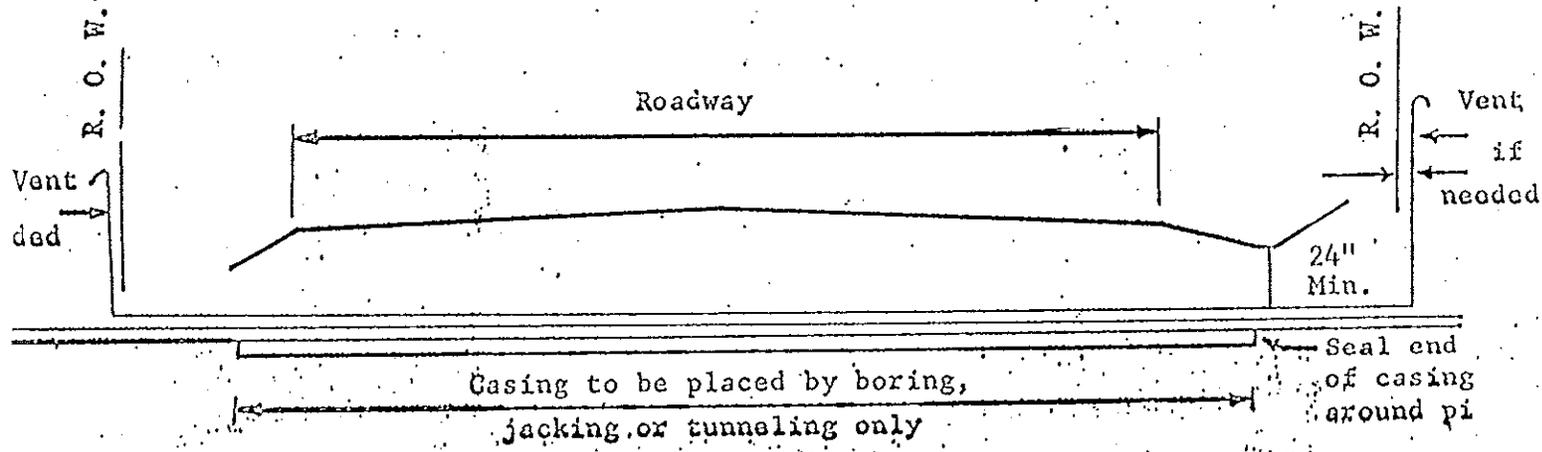

Open trench to minimum width required.

Backfill trench to surface level pending replacing pavement.

Remove surplus backfill and remove extra 1 ft. of paving on each side.

Replace pavement in kind.